

# FLOWATCH® TANK


**SICCOM**  
INNOVATIVE VISION

Centrifugal pump high efficiency for the removal of acid and charged condensates of gas condensing boilers.

Ref: DE13QCA700



pH > 2.5

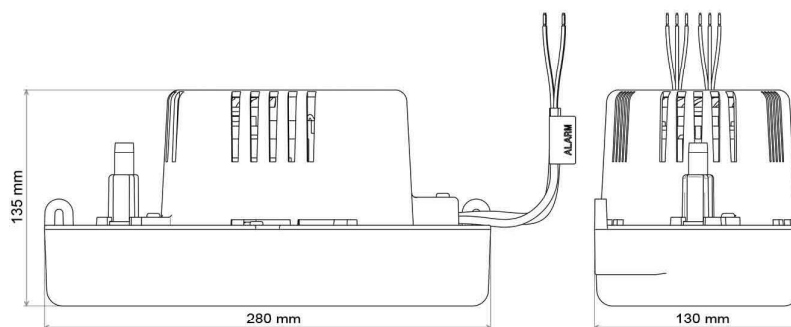

**pH > 2.5**

Hose diameter

Discharge - 9/12 mm or 6/9 mm - Not supplied




## Specifications

Flowrate max	788 l/h
Discharge head max	5.5 m
pH tolerated	pH > 2.5
Max temperature of condensates	60°C
Electrical power	80W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 3A
Noise level	47 dBA
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	30%
Power / alarm cable lenght	2m / 1m
Dimensions	280 x 130 x 135 mm

\* The pump is able to run 30% of the time if necessary. (ex 3s ON / 7s OFF)

## Flowrate

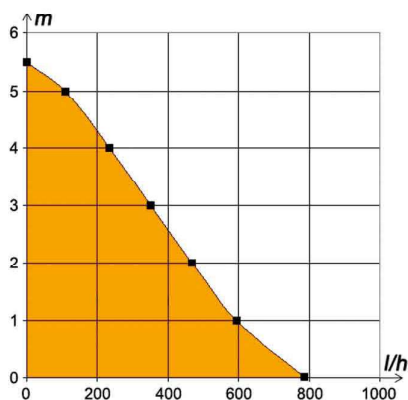

## Benefits



### High efficiency

Flowrate 788 l/h

Discharge head 5.5 m



### Reversible tank

Allows the FLOWATCH® TANK to be installed in any configuration.



### Removable check valve

The check valve supplied can be removed easily (1/4 turn) to be cleaned.



### 2 possible outlet diameters

Original outlet for 9/12mm tube  
+ reducer for 6/9mm tube



### Condensate inlet reducer

Guarantees an easy connection to the boiler.

## Pack contents



Pump with check valve, 3 taps - Inlet adaptor - 6/9mm outlet adaptor - Screws and rawlplugs