


UP-SE6018GS-EAE00



**ENGINEERING CODE**  
6S1BOS6C3FI

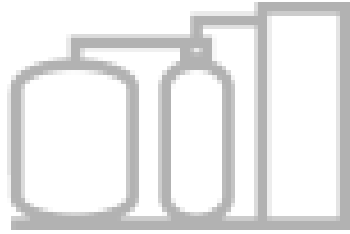

**REFRIGERANT**  
R-449A



**POWER SUPPLY**  
380-420 V 50 Hz  
/ 460 V 60 Hz



**APPLICATION**  
HBP



**MOTOR TYPE**  
3PH



**STANDARD**  
EN13215\_RG20



**COOLING CAPACITY**  
4552 W



**EFFICIENCY**  
2.16 W/W

Performance Data Sheet according to EU Regulation 2015/1095

PERFORMANCE CURVE

Parameters at full load and ambient temperature 25 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	4946	1895.8	2.61

PERFORMANCE CURVE

Parameters at full load and ambient temperature 32 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	4552	2104.1	2.16

PERFORMANCE CURVE

Parameters at full load and ambient temperature 43 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	3838	2526.4	1.52