


UP-SE6030GS-EAE00

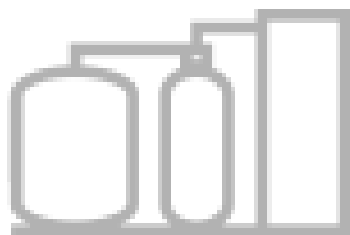

ENGINEERING CODE
6S1DOS6C3FI

REFRIGERANT
R-449A

POWER SUPPLY
380-420 V 50 Hz
/ 460 V 60 Hz

APPLICATION
HBP

MOTOR TYPE
3PH

STANDARD
EN13215_RG20



COOLING CAPACITY
7450 W

EFFICIENCY
2.29 W/W



Performance Data Sheet according to EU Regulation 2015/1095

PERFORMANCE CURVE Parameters at full load and ambient temperature 25 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	8089	2931.7	2.76

PERFORMANCE CURVE Parameters at full load and ambient temperature 32 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	7450	3248.2	2.29

PERFORMANCE CURVE Parameters at full load and ambient temperature 43 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	6300	3887.1	1.62