


UP-SE6036GS-EAE00



ENGINEERING CODE
6S1EOS6C3FI

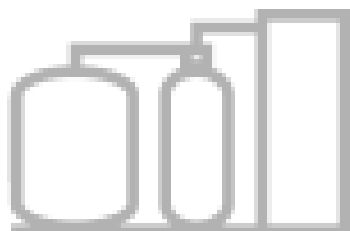

REFRIGERANT
R-449A



POWER SUPPLY
380-420 V 50 Hz
/ 460 V 60 Hz



APPLICATION
HBP



MOTOR TYPE
3PH



STANDARD
EN13215_RG20



COOLING CAPACITY
9262 W



EFFICIENCY
2.43 W/W

Performance Data Sheet according to EU Regulation 2015/1095

PERFORMANCE CURVE

Parameters at full load and ambient temperature 25 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	10039	3436.4	2.92

PERFORMANCE CURVE

Parameters at full load and ambient temperature 32 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	9262	3810.7	2.43

PERFORMANCE CURVE

Parameters at full load and ambient temperature 43 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	7866	4560.9	1.72