


UP-SE6021GS-EAE00



**ENGINEERING CODE**  
6S1COS6C3FI

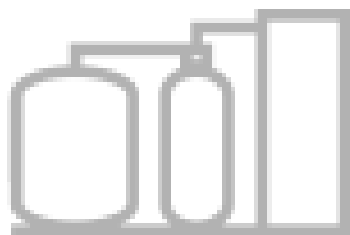

**REFRIGERANT**  
R-449A



**POWER SUPPLY**  
380-420 V 50 Hz  
/ 460 V 60 Hz



**APPLICATION**  
HBP



**MOTOR TYPE**  
3PH



**STANDARD**  
EN13215\_RG20



**COOLING CAPACITY**  
5091 W



**EFFICIENCY**  
2.15 W/W



Performance Data Sheet according to EU Regulation 2015/1095

PERFORMANCE CURVE

Parameters at full load and ambient temperature 25 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	5545	2132.9	2.60

PERFORMANCE CURVE

Parameters at full load and ambient temperature 32 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	5091	2370.0	2.15

PERFORMANCE CURVE

Parameters at full load and ambient temperature 43 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	4267	2854.0	1.50